



Your Solutions Partner

Specifications

F.O.B St. Louis, Missouri 63102



Pans Not Included

HS2-34 SHOWN

BODY:

- Stainless Steel Exterior construction for durability and ease of construction
- Robust metal cover eliminates the cost and hassle of plastic lids.
- Fully sealed, user replaceable timer bars that are designed for cleanability.
- Eliminate faceplate cracks with new stainless steel construction
- Sturdy, fully sealed shelves to prevent grease migration

HEATING:

- Shelf or Zone (2X3, 2x4 & 3x4 only) wells for customized heating solutions
- Quick heat up approximately 20 minutes



DUKE MANUFACTURING CO.
 2305 N. Broadway
 St. Louis, MO 63102

800.735.3853 Toll Free
 314.231.5074 Fax
 www.dukemfg.com

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____
 ITEM: _____
 QUANTITY: _____

MODEL:

Product Holding Unit - HS2

- HS2-22 2 down, 2 across
- HS2-23 2 down, 3 across
- HS2-24 2 down, 4 across
- HS2-34 3 down, 4 across
- HS2-42 4 down, 2 across

CONTROLS:





- Allows operator to set time decrement for each pan
- Cook time warning allows for timely replenishment
- Improved display shows item being held
- Easy to reconfigure pan settings with flash drive programming feature from web based program site

OPTIONAL ITEMS:

- Front and Rear Timer Bars
- Lids
- Pans
- Drain Shelves

SHORT FORM SPECIFICATIONS:

Duke Product Holding Units - Thermostatically controlled heating pads attach to aluminum heat sink plate for consistent, uniform heating of pre-cooked food. Body shall be constructed of stainless steel. Alphanumeric displays and web based programming track product hold times and temperatures.

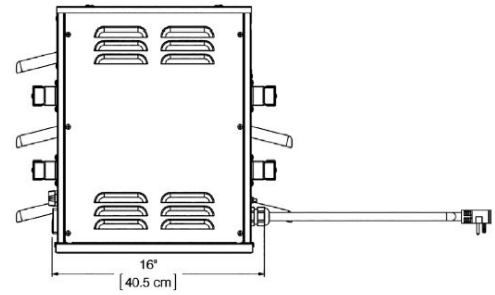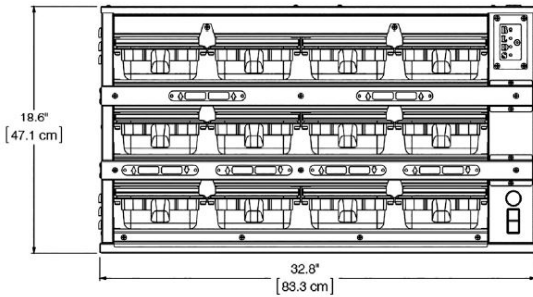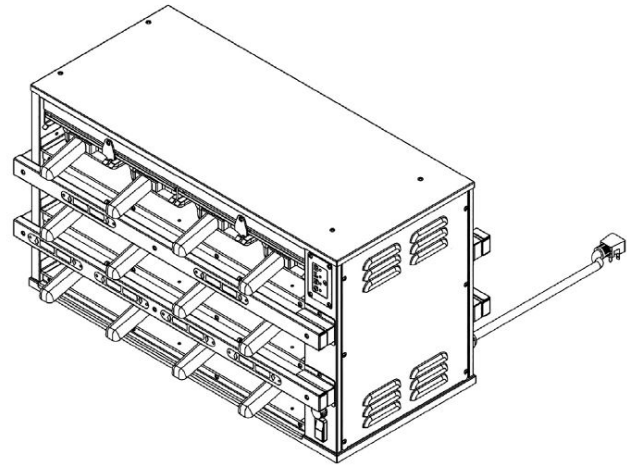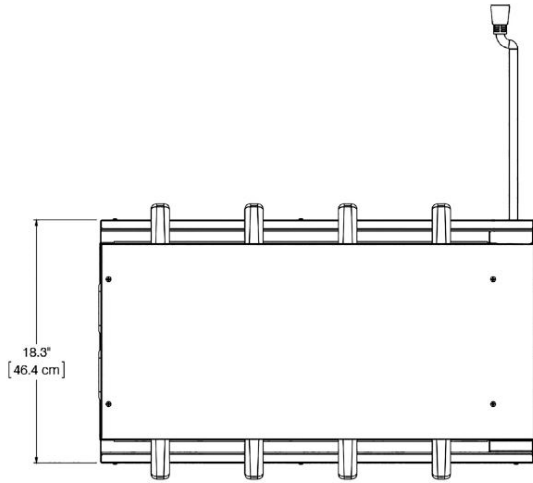

HS2-34 SHOWN

DIMENSIONS:

Model	Height		Width		Depth		Crated Ship Weight	
	in	cm	in	cm	in	cm	lbs	kg
HS2-22	12.9	32.8	18.7	47.4	18.3	46.5	84	38
HS2-23	12.9	32.8	25.7	65.3	18.3	46.5	101	46
HS2-24	12.9	32.8	32.8	83.3	18.3	46.5	117	53
HS2-34	18.6	47.2	32.8	83.3	18.3	46.5	162	74
HS2-42	24.2	61.5	18.7	47.4	18.3	46.5	126	57

ELECTRICAL:

Model	208/240 Volt - Hz 50/60		220/240 Volt - Hz 50/60	
	Amps	NEMA	Amps	IEC
HS2-22	8.7/7.5	6-15P	8.2/7.5	60309
HS2-23	8.7/7.5	6-15P	8.2/7.5	60309
HS2-24	12.0/10.0	6-15P	11.0/10.0	60309
HS2-34	17.3/15.0	6-20P	16.0/15.0	60309
HS2-42	12.0/10.0	6-15P	11.0/10.0	60309



Your Solutions Partner

DUKE MANUFACTURING CO.

2305 N. Broadway
 St. Louis, MO 63102
 800.735.3853 Toll Free
 314.231.5074 Fax
 www.dukmfg.com

Specification subject to change

Printed in U.S.A
 © 2017, Duke Manufacturing Co.